

Sovereign

Wall Mounted

Summary:

Manufacture:

- 1.5mm Zintec steel
- 10mm Radius edges / bullnose corners
- Honeycomb Punched grille top and bottom

Emitter:

- Lamella heat exchanger

Valve options available:

- Direct fit External TRV kit
- Direct fit External TRV kit with remote sensor

Finish:

Polyester powder coated in 3 standard designs;

- Option A
Front face = RAL 9016-White
Top and sides = RAL 9016 White
- Option B
Front face = RAL 9016-White
Top and sides = RAL Dark Slate Grey Textured finish
- Option C
Front face = RAL 5008 Grey Blue
Top and sides = RAL 7035 Light Grey
- Bespoke colour choices available

Technical Information & Specifications

Standard delivery

- Standard delivery comprises radiator guard of choice, corresponding Lamella heat exchanger (1W, 2W, 3W and 4W as specified) and a Reverse angle Herz ½" external direct fit valve kit (suitable for 15mm copper to copper connection on a two-pipe system)
- Colour of casing to be specified at time of order.

*Additional carriage charges will apply for multiple phases


Heat Outputs to BS EN 442 Certification.

Outputs based on a mean radiator water temperature of 70°C and a room temperature of 20°C - Delta T 50°C

To achieve Delta T60 increase T50 figures by 20.5%

To calculate alternative Delta T requirements please refer to page 103

To convert BTU to Watts multiply by 0.293. To convert Watts to BTU divide by 0.293

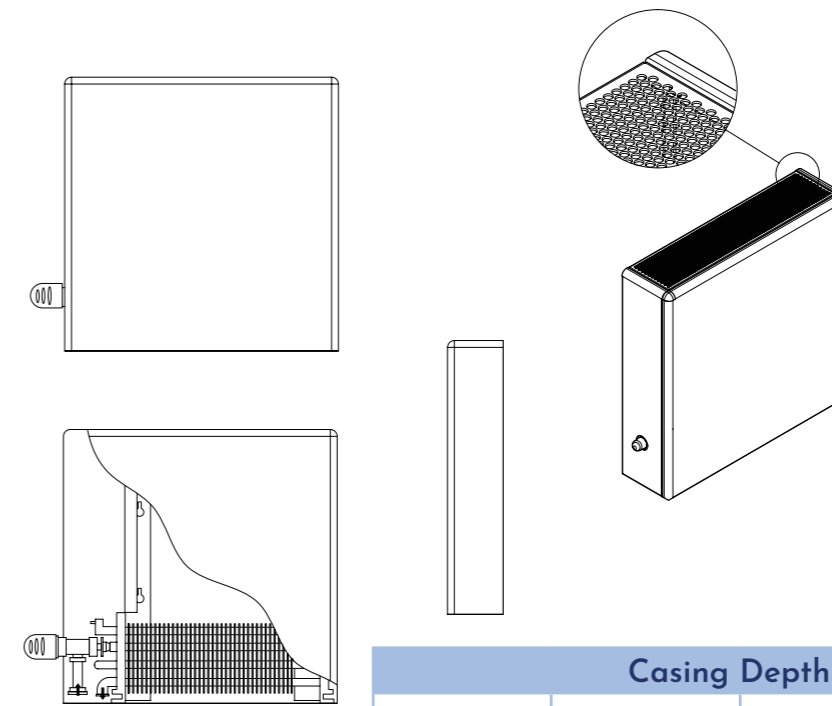

Casing Depth			
Type 1W 82mm	Type 2W 122mm	Type 3W 182mm	Type 4W 242mm

