

# DeepClean Extra Tolerance Sheet

Sheet number

**DE-S-W-01**

Guard Design

**DeepClean Extra**

Guard Specification

- Sloping Top
- Wall Mounted

Valve Connection



**90° Angle BBOE\***

\*bottom, bottom, opposite ends

## Valve Kit Bodies

Angle - flow  
TS90 - 7724\_g1

Angle - return (lock shield)  
RL1 - 3724\_41



Technical Data:

- Body material: Brass nickel plated
- Max operating pressure: 10 bar
- Max operating temp: 110°C
- Connection thread: ISO 228-1

Emitter as standard should be fitted  
200mm from the floor.

Valve connections are **BBOE**.

Any drain off valves installed must be  
within the length and depth of the guard.


All valves are suitable for 1/2 inch steel  
pipes.

All kits come complete with a nut and  
olive to accept 15mm BSP copper.

Match the desired guard design to the existing radiator plumbing connection.  
Ensure the correct match of both guard, radiator and valve arrangement to calculate the  
space tolerances needed to specify the guard sizes accurately.




Tel: +44 (0) 1952 290 498  
sales@contourheating.co.uk

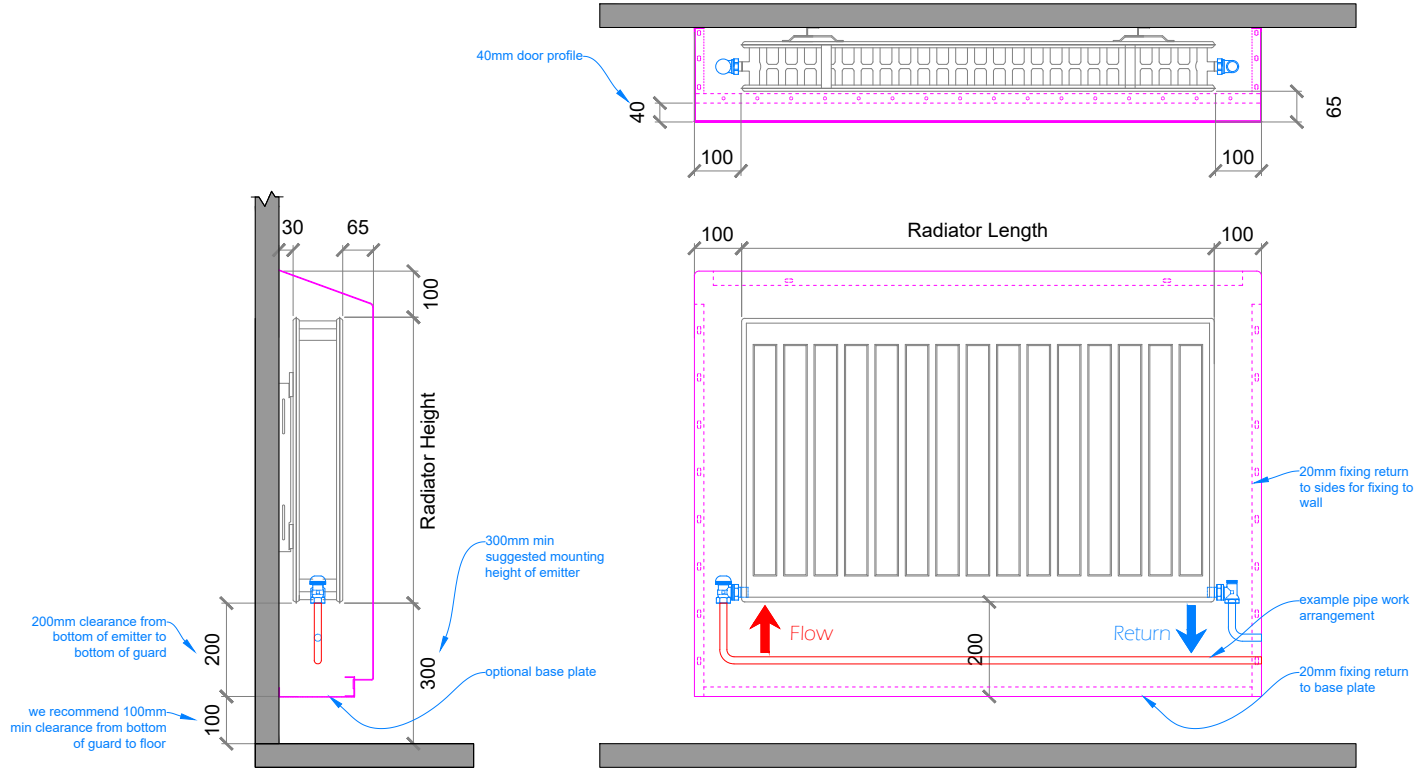


\* All dimensions in mm.  
\* Drawings not to scale.


## Thermostatic Valve Options

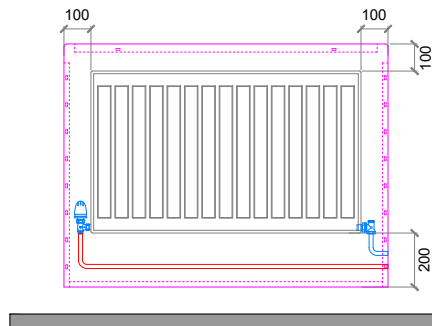

Internal  
Code: 9210 - 13

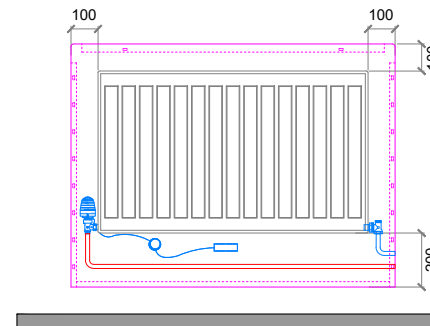

Internal with Remote Sensor  
Code: 7463 - 41

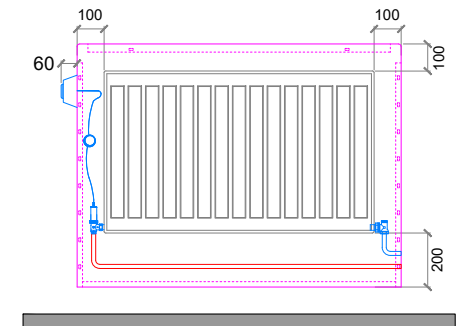

External Anti Ligature (back to wall)  
Code: 1935241

# DeepClean Extra Tolerance Sheet

Sheet number

**DE-S-W-02**

Guard Design

**DeepClean Extra**

Guard Specification

- Sloping Top
- Wall Mounted

Valve Connection



90° Angle TBOE\*

\*top, bottom, opposite ends

## Valve Kit Bodies

Angle - flow  
TS90 - 7724\_g1

Angle - return (lock shield)  
RL1 - 3724\_41



Technical Data:

- Body material: Brass nickel plated
- Max operating pressure: 10 bar
- Max operating temp: 110°C
- Connection thread: ISO 228-1

Emitter as standard should be fitted 200mm from the floor.

Valve connections are **TBOE**.

Any drain off valves installed must be within the length and depth of the guard.


All valves are suitable for 1/2 inch steel pipes.  
All kits come complete with a nut and olive to accept 15mm BSP copper.

*\*internal TRV not recommended due to the sensor being inside the cover at the top. This may cause an inaccurate reading and shut the valve off before reaching optimum desired temperature.*

Match the desired guard design to the existing radiator plumbing connection.  
Ensure the correct match of both guard, radiator and valve arrangement to calculate the space tolerances needed to specify the guard sizes accurately.




Tel: +44 (0) 1952 290 498  
sales@contourheating.co.uk

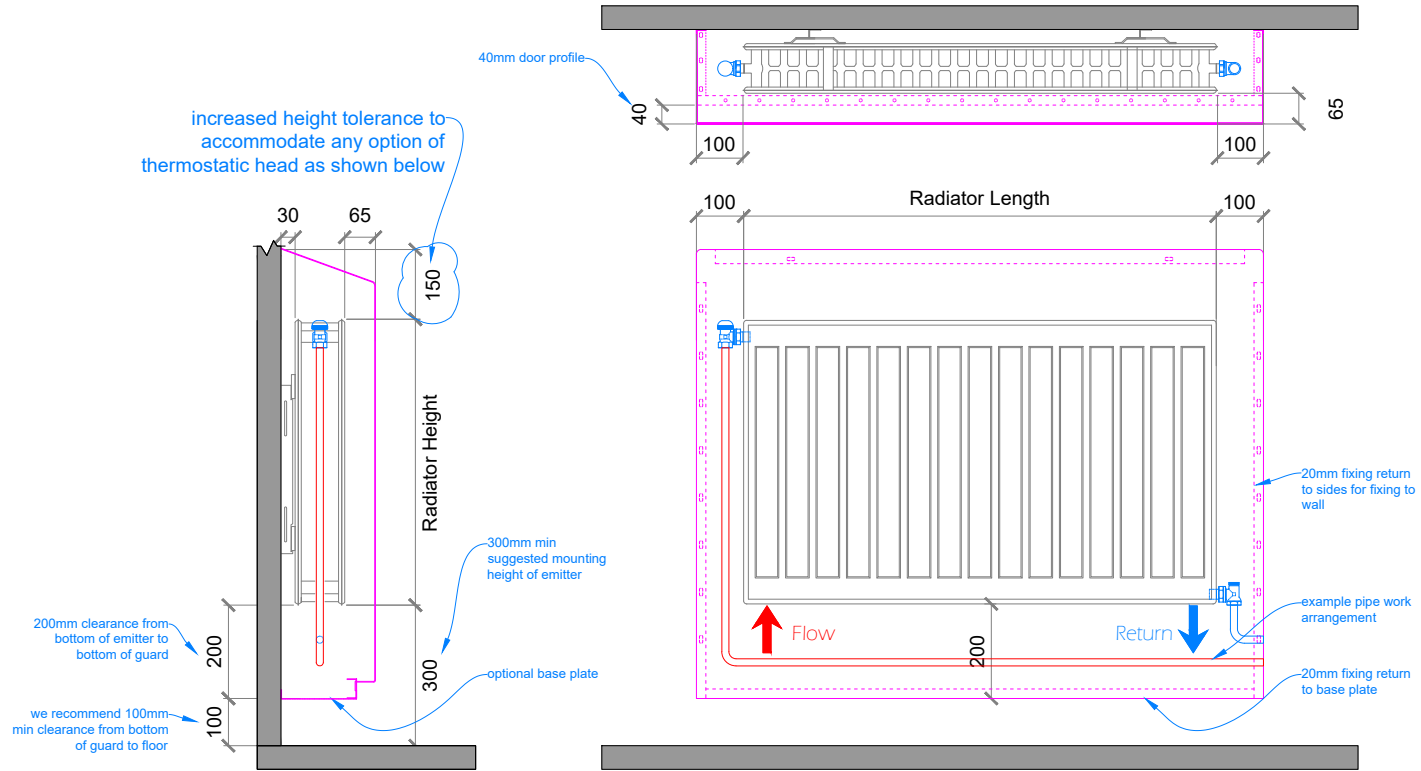

\* All dimensions in mm.  
\* Drawings not to scale.

## Thermostatic Valve Options

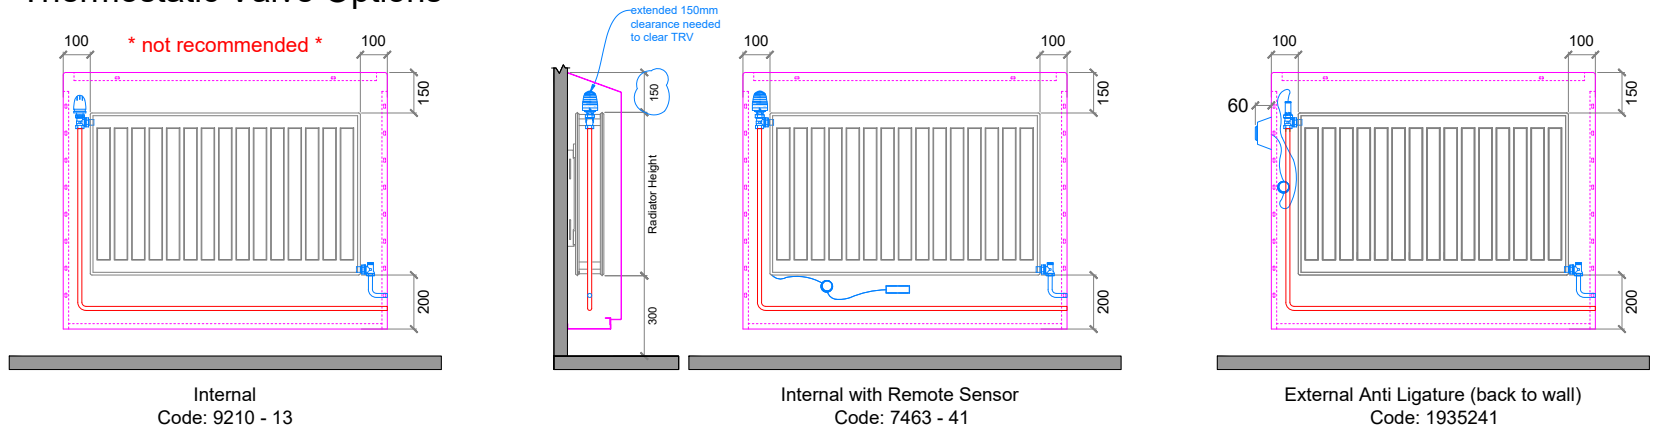

Internal  
Code: 9210 - 13

Internal with Remote Sensor  
Code: 7463 - 41

External Anti Ligature (back to wall)  
Code: 1935241

# DeepClean Extra Tolerance Sheet

Sheet number

**DE-S-W-03**

Guard Design

**DeepClean Extra**

Guard Specification

- Sloping Top
- Wall Mounted

Valve Connection


**90° Reverse Angle TBOE\***

\*top, bottom, opposite ends

## Valve Kit Bodies

Reverse Angle - flow  
TS90 - 7728\_g1

Angle - return (lock shield)  
RL1 - 3724\_41



Technical Data:

- Body material: Brass nickel plated
- Max operating pressure: 10 bar
- Max operating temp: 110°C
- Connection thread: ISO 228-1

Emitter as standard should be fitted 200mm from the floor.

Valve connections are **TBOE**.

Any drain off valves installed must be within the length and depth of the guard.

All valves are suitable for 1/2 inch steel pipes.


All kits come complete with a nut and olive to accept 15mm BSP copper.

*\*internal TRV not recommended due to the sensor being inside the cover at the top. This may cause an inaccurate reading and shut the valve off before reaching optimum desired temperature.*

Match the desired guard design to the existing radiator plumbing connection.  
Ensure the correct match of both guard, radiator and valve arrangement to calculate the space tolerances needed to specify the guard sizes accurately.




Tel: +44 (0) 1952 290 498  
sales@contourheating.co.uk

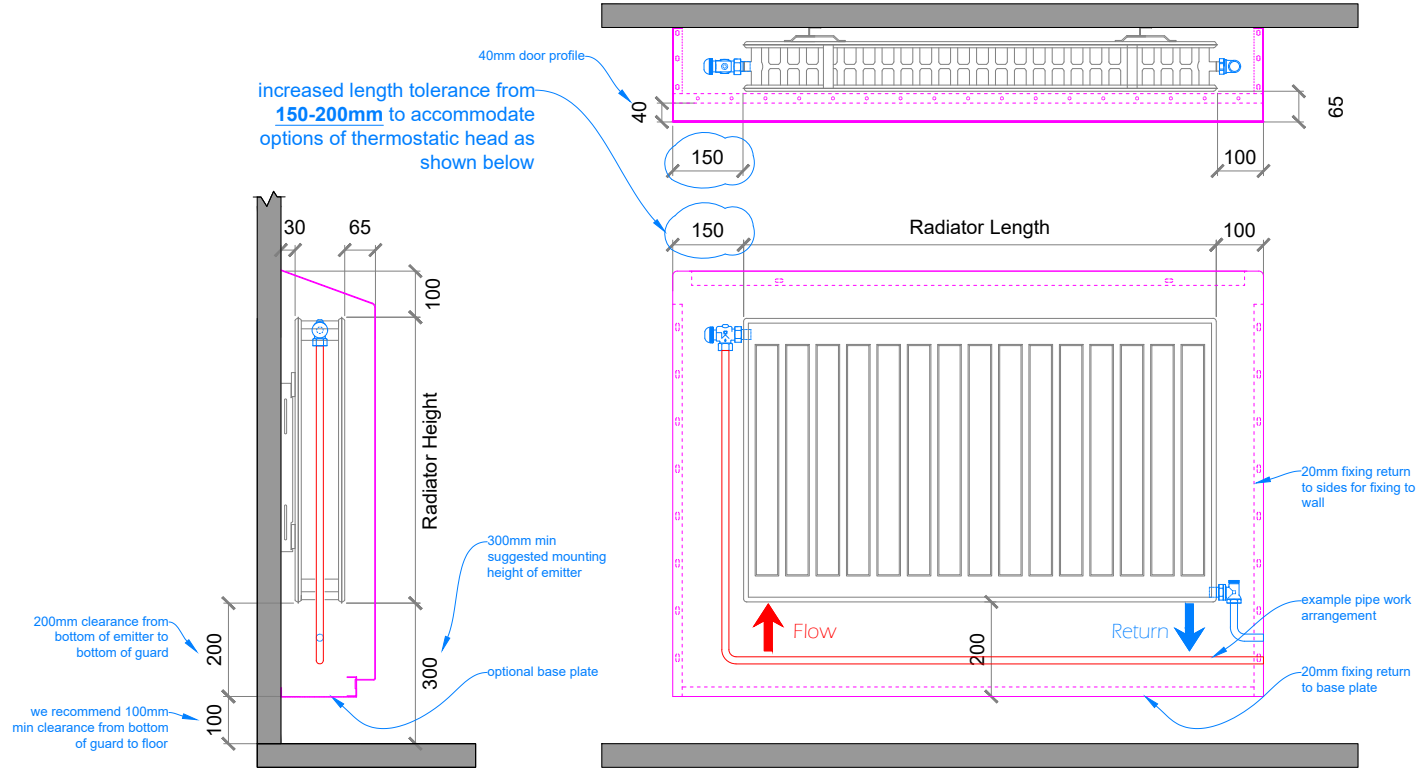

\* All dimensions in mm.  
\* Drawings not to scale.

## Thermostatic Valve Options

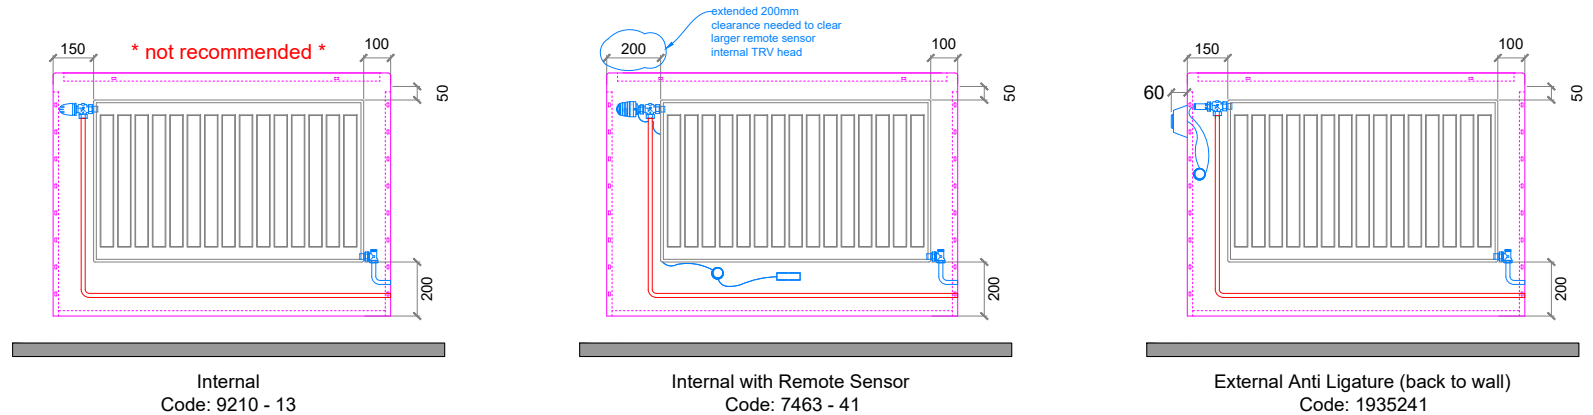

Internal  
Code: 9210 - 13

Internal with Remote Sensor  
Code: 7463 - 41

External Anti Ligature (back to wall)  
Code: 1935241

# DeepClean Extra Tolerance Sheet

Sheet number

**DE-S-W-04**

Guard Design

**DeepClean Extra**

Guard Specification

- Sloping Top
- Wall Mounted

Valve Connection



**Straight with Elbow TBOE\***

\*top, bottom, opposite ends

## Valve Kit Bodies

Straight - flow  
TS90 - 7723\_g1

Angle - return (lock shield)  
RL1 - 3724\_41



Technical Data:

- Body material: Brass nickel plated
- Max operating pressure: 10 bar
- Max operating temp: 110°C
- Connection thread: ISO 228-1

Emitter as standard should be fitted 200mm from the floor.

Valve connections are **TBOE**.

Any drain off valves installed must be within the length and depth of the guard.

All valves are suitable for 1/2 inch steel pipes.


All kits come complete with a nut and olive to accept 15mm BSP copper.

*\*internal TRV not recommended due to the sensor being inside the cover at the top. This may cause an inaccurate reading and shut the valve off before reaching optimum desired temperature.*

Match the desired guard design to the existing radiator plumbing connection.  
Ensure the correct match of both guard, radiator and valve arrangement to calculate the space tolerances needed to specify the guard sizes accurately.




Tel: +44 (0) 1952 290 498  
sales@contourheating.co.uk

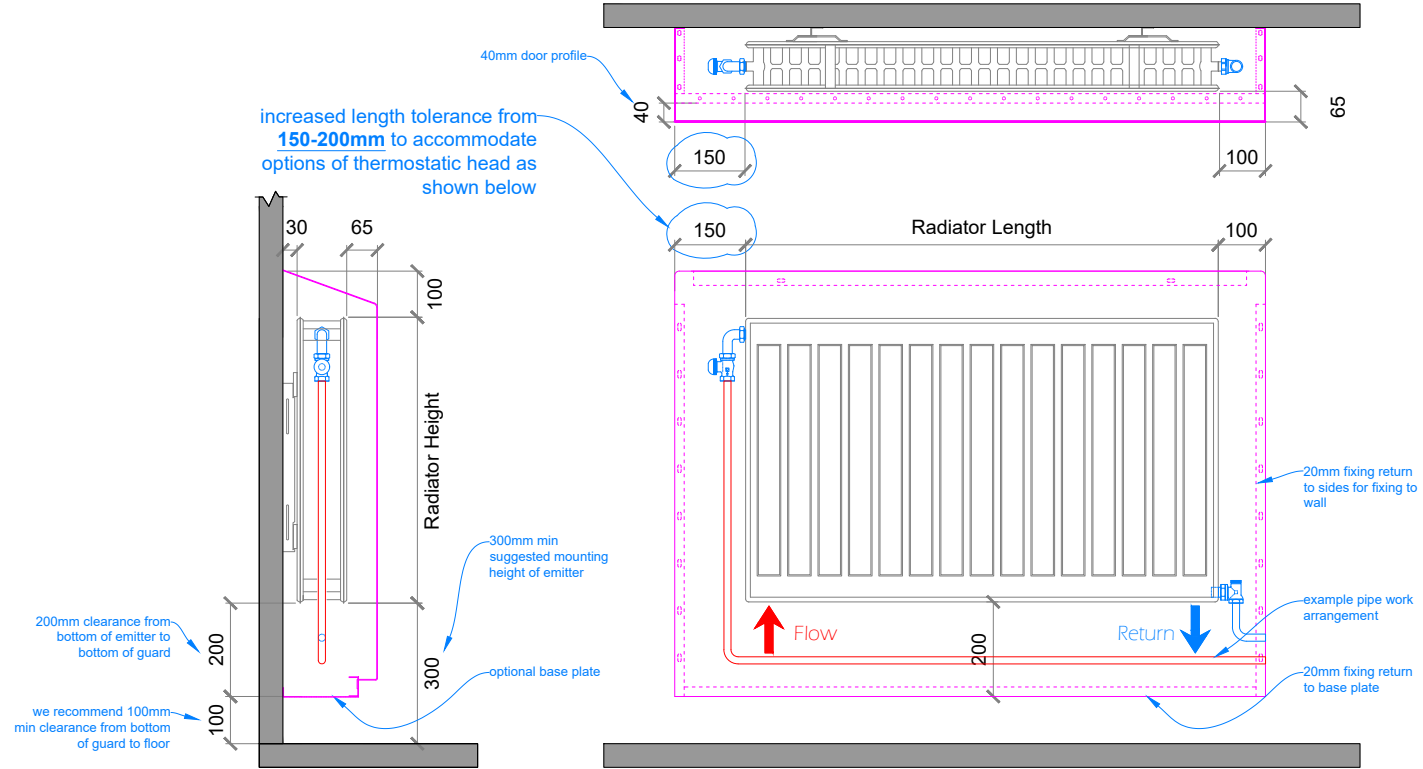

\* All dimensions in mm.  
\* Drawings not to scale.

## Thermostatic Valve Options

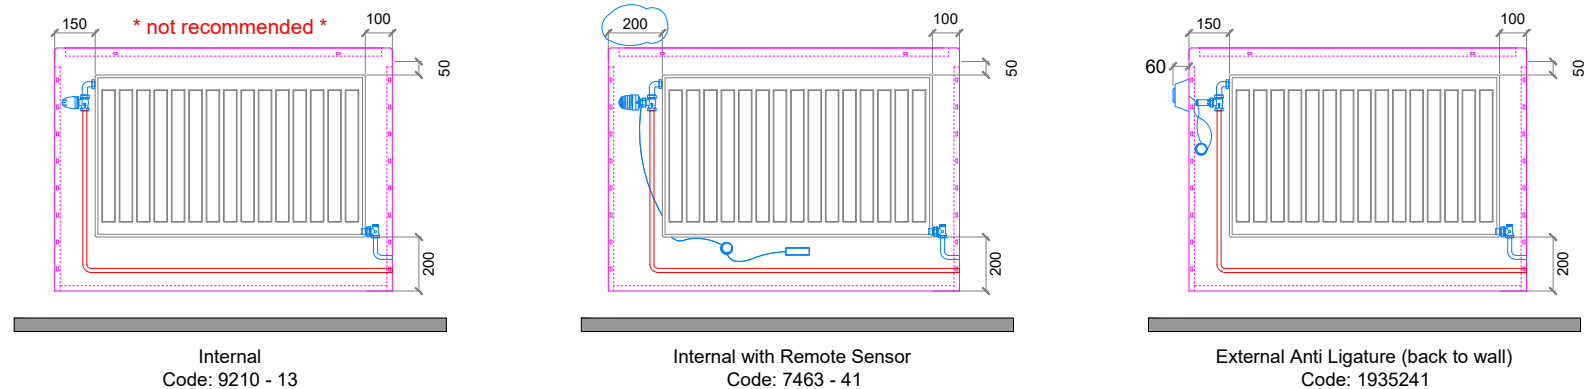

Internal  
Code: 9210 - 13

Internal with Remote Sensor  
Code: 7463 - 41

External Anti Ligature (back to wall)  
Code: 1935241

# DeepClean Extra Tolerance Sheet

Sheet number

**DE-S-W-05**

Guard Design

**DeepClean Extra**

Guard Specification

- Sloping Top
- Wall Mounted

Valve Connection



**Straight with Elbow TBOE\***

(Forward Facing) \*top, bottom, opposite ends

## Valve Kit Bodies

Straight - flow  
TS90 - 7723\_g1

Angle - return (lock shield)  
RL1 - 3724\_41



Technical Data:

- Body material: Brass nickel plated
- Max operating pressure: 10 bar
- Max operating temp: 110°C
- Connection thread: ISO 228-1

Emitter as standard should be fitted 200mm from the floor.

Valve connections are **TBOE**.

Any drain off valves installed must be within the length and depth of the guard.

All valves are suitable for 1/2 inch steel pipes.


All kits come complete with a nut and olive to accept 15mm BSP copper.

*\*internal TRV not recommended due to the sensor being inside the cover at the top. This may cause an inaccurate reading and shut the valve off before reaching optimum desired temperature.*

Match the desired guard design to the existing radiator plumbing connection.  
Ensure the correct match of both guard, radiator and valve arrangement to calculate the space tolerances needed to specify the guard sizes accurately.




Tel: +44 (0) 1952 290 498  
sales@contourheating.co.uk

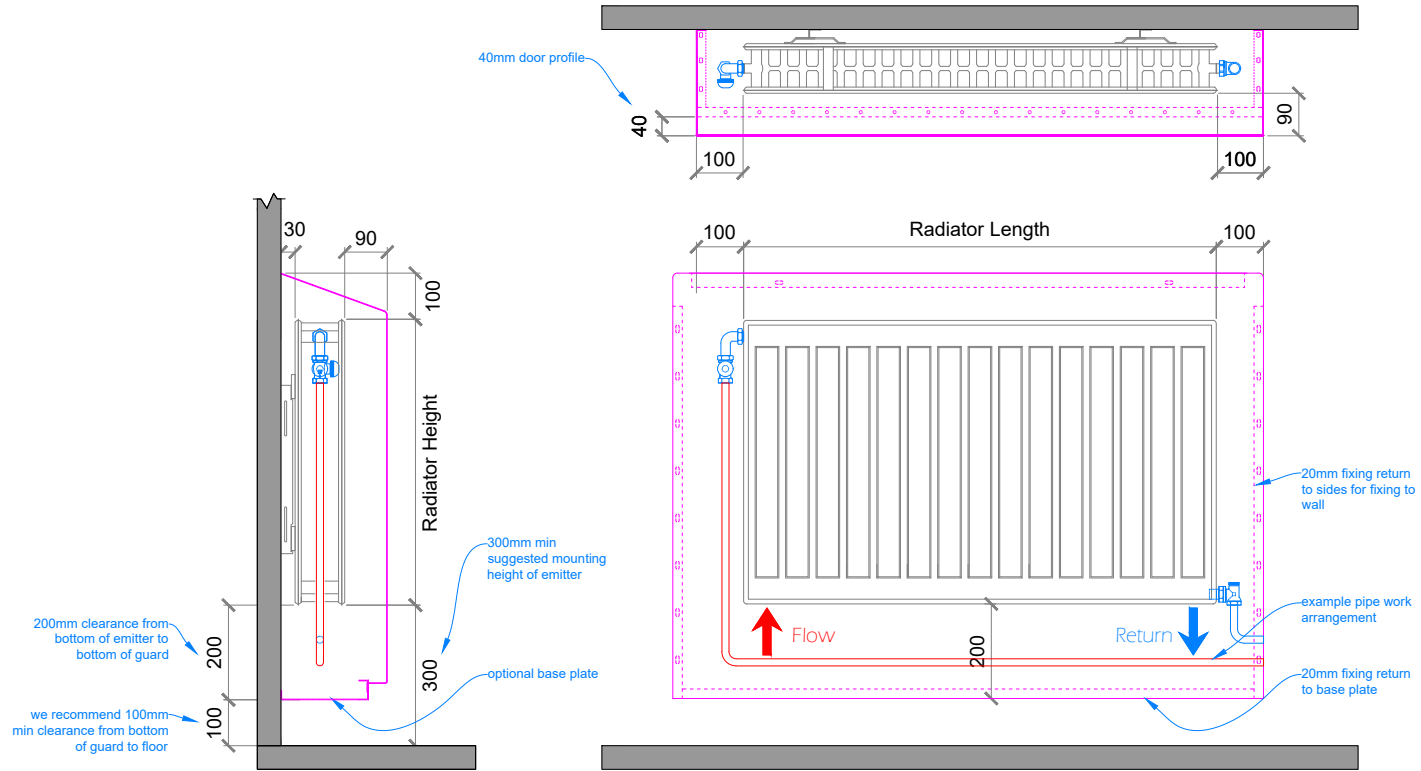


\* All dimensions in mm.  
\* Drawings not to scale.


## Thermostatic Valve Options



Internal  
Code: 9210 - 13



Internal with Remote Sensor  
Code: 7463 - 41



External Anti Ligature (back to wall)  
Code: 1935241